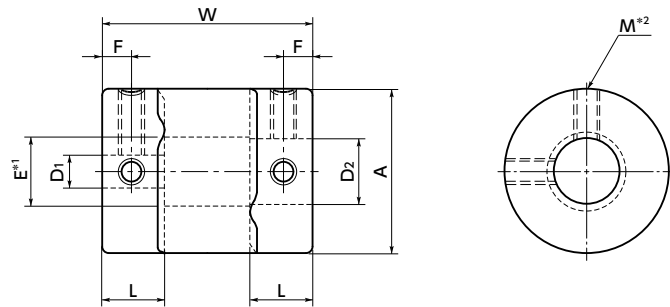


XGT

*1 : $E = D_2 + 0.5 (D_2 < 5)$ $E = D_2 + 1 (D_2 \geq 5)$ *2 : In a case where the bore diameter is $\phi 4$ or less, the set screw is used in only one place.

Dimensions

Unit : mm

Part Number	A	L	W	F	M	Screw Tightening Torque (N·m)
XGT-15	15	6.5	23	3	M3	0.7
XGT-19	19	7.7	26	4	M3	0.7
XGT-25	25	9.5	32	5	M4	1.7
XGT-27	27	9.5	32	5	M4	1.7
XGT-30	30	11	36	5.5	M4	1.7
XGT-34	34	12	38	6	M5	4
XGT-39	39	15.5	48	8	M5	4
XGT-44	44	15	48	7.5	M6	7
XGT-56	56	19.5	60	10	M6	7

Part Number	Standard Bore Diameter (Dimensional Allowance H8) D1-D2									
XGT-15	3 - 5	3 - 6	4 - 4	4 - 5	4 - 6	4.5 - 5	5 - 5	5 - 6	6 - 6	
XGT-19	4 - 5 6.35 - 8	4 - 8 8 - 8	5 - 5	5 - 6	5 - 7	5 - 8	6 - 6	6 - 6.35	6 - 7	6 - 8
XGT-25	5 - 6 8 - 10	5 - 8 8 - 11	6 - 6 8 - 12	6 - 8 10 - 10	6 - 10 10 - 12	6 - 11 12 - 12	6 - 12	6.35 - 8	6.35 - 10	8 - 8
XGT-27	5 - 6 8 - 10	5 - 8 8 - 11	5 - 14 8 - 12	6 - 6 8 - 14	6 - 8 10 - 10	6 - 10 10 - 12	6 - 11 10 - 14	6 - 12 12 - 12	6 - 14 12 - 14	8 - 8 14 - 14
XGT-30	8 - 8 10 - 15	8 - 10 11 - 12	8 - 11 12 - 12	8 - 12 12 - 14	8 - 14 12 - 15	8 - 15 14 - 14	10 - 10 14 - 15	10 - 11 15 - 15	10 - 12	10 - 14
XGT-34	8 - 8 10 - 15	8 - 10 11 - 11	8 - 11 11 - 12	8 - 12 12 - 12	8 - 14 12 - 14	8 - 15 12 - 15	10 - 10 14 - 14	10 - 11 14 - 15	10 - 12 15 - 15	10 - 14 16 - 16
XGT-39	10 - 10 12 - 20	10 - 12 14 - 14	10 - 14 14 - 15	10 - 15 14 - 16	10 - 16 15 - 15	12 - 12 15 - 16	12 - 14 15 - 19	12 - 15 16 - 16	12 - 16 17 - 17	12 - 19 20 - 20
XGT-44	12 - 12 15 - 19	12 - 14 15 - 20	12 - 16 16 - 16	12 - 19 16 - 19	14 - 14 17 - 17	14 - 15 19 - 20	14 - 16 20 - 20	14 - 19	15 - 15	15 - 16
XGT-56	15 - 15	15 - 19	15 - 20	15 - 25	19 - 20	19 - 24	20 - 20	20 - 25	24 - 25	25 - 25

• All products are provided with hex socket set screws.

• Recommended tolerance for shaft diameters is h6 and h7.

Performance

Part Number	Max. Bore Diameter (mm)	Keyway Additional Modification Max. Bore Diameter (mm)	Rated *1 Torque (N·m)	Max. Rotational Frequency (min ⁻¹)	Moment*2 of Inertia (kg·m ²)	Static Torsional Stiffness (N·m/rad)	Max. Lateral Misalignment (mm)	Max. Angular Misalignment (°)	Max. Axial Misalignment (mm)	Mass *2 (g)
XGT-15	6	—	1.1	42000	2.6×10^{-7}	43	0.15	1.5	±0.2	9
XGT-19	8	6	2.1	33000	7.5×10^{-7}	88	0.15	1.5	±0.2	15
XGT-25	12	9	4	25000	2.7×10^{-6}	140	0.15	1.5	±0.2	29
XGT-27	14	10	4	23000	3.6×10^{-6}	140	0.15	1.5	±0.2	32
XGT-30	15	11	6.3	21000	6.3×10^{-6}	220	0.2	1.5	±0.3	46
XGT-34	16	12	8	18000	1.1×10^{-5}	390	0.2	1.5	±0.3	66
XGT-39	20	15	13.5	16000	2.4×10^{-5}	520	0.2	1.5	±0.3	103
XGT-44	22	17	18	14000	4.0×10^{-5}	640	0.2	1.5	±0.3	133
XGT-56	28	22	35	11000	1.3×10^{-4}	1500	0.2	1.5	±0.3	267

*1 : Correction of rated torque due to load fluctuation is not required. If ambient temperature exceeds 30°C, be sure to correct the rated torque with temperature correction factor shown in the following table.

The allowable operating temperature of **XGT** is -20°C to 80°C.

※ The shaft's slip torque may be smaller than the coupling's rated torque depending on the shaft bore. ➡ P.xxxx

*2 : These are values with max. bore diameter.

● Ambient Temperature / Temperature Correction Factor

Ambient Temperature	Temperature Correction Factor
-20°C to 30°C	1.00
30°C to 40°C	0.80
40°C to 60°C	0.70
60°C to 80°C	0.55


● Part number specification

XGT-39 - 12-20

1

2

XGT-CS

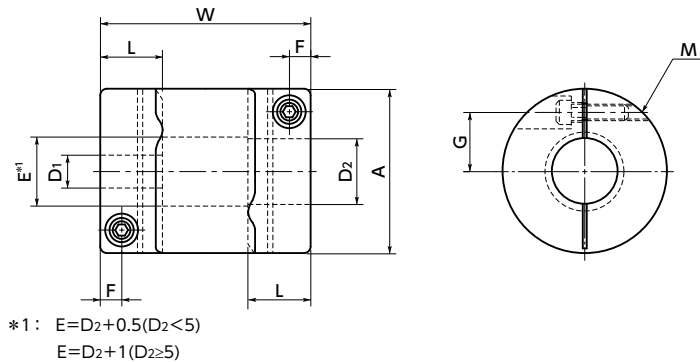

Dimensions

Unit : mm

Part Number	A	L	W	F	G	M	Screw Tightening Torque (N・m)
XGT-15CS	15	6.5	23	2.15	5	M1.6	0.25
XGT-19CS	19	7.7	26	2.65	6.5	M2	0.5
XGT-25CS	25	9.5	32	3.25	9	M2.5	1
XGT-27CS	27	9.5	32	3.25	10	M2.5	1
XGT-30CS	30	11	36	4	11	M3	1.5
XGT-34CS	34	12	38	4	12.25	M3	1.5
XGT-39CS	39	15.5	48	4.5	14.5	M4	2.5
XGT-44CS	44	15	48	4.75	16	M4	2.5
XGT-56CS	56	19.5	60	5.5	20	M5	7

Part Number	Standard Bore Diameter D1-D2									
XGT-15CS	3 - 5	3 - 6	4 - 4	4 - 5	4 - 6	4.5 - 5	5 - 5	5 - 6	6 - 6	
XGT-19CS	4 - 5 6.35 - 8	4 - 8 8 - 8	5 - 5	5 - 6	5 - 7	5 - 8	6 - 6	6 - 6.35	6 - 7	6 - 8
XGT-25CS	5 - 6 8 - 10	5 - 8 8 - 11	6 - 6 8 - 12	6 - 8 10 - 10	6 - 10 10 - 12	6 - 11 12 - 12	6 - 12	6.35 - 8	6.35 - 10	8 - 8
XGT-27CS	5 - 6 8 - 10	5 - 8 8 - 11	5 - 14 8 - 12	6 - 6 8 - 14	6 - 8 10 - 10	6 - 10 10 - 12	6 - 11 10 - 14	6 - 12 12 - 12	6 - 14 12 - 14	8 - 8 14 - 14
XGT-30CS	8 - 8 10 - 15	8 - 10 11 - 12	8 - 11 12 - 12	8 - 12 12 - 14	8 - 14 12 - 15	8 - 15 14 - 14	10 - 10 14 - 15	10 - 11 15 - 15	10 - 12	10 - 14
XGT-34CS	8 - 8 10 - 15	8 - 10 11 - 11	8 - 11 11 - 12	8 - 12 12 - 12	8 - 14 12 - 14	8 - 15 12 - 15	10 - 10 14 - 14	10 - 11 14 - 15	10 - 12 15 - 15	10 - 14 16 - 16
XGT-39CS	10 - 10 12 - 20	10 - 12 14 - 14	10 - 14 14 - 15	10 - 15 14 - 16	10 - 16 15 - 15	12 - 12 15 - 16	12 - 14 15 - 19	12 - 15 16 - 16	12 - 16 17 - 17	12 - 19 20 - 20
XGT-44CS	12 - 12 15 - 19	12 - 14 15 - 20	12 - 16 16 - 16	12 - 19 16 - 19	14 - 14 17 - 17	14 - 15 19 - 20	14 - 16 20 - 20	14 - 19	15 - 15	15 - 16
XGT-56CS	15 - 15	15 - 19	15 - 20	15 - 25	19 - 20	19 - 24	20 - 20	20 - 25	24 - 25	25 - 25

- All products are provided with hex socket head cap screw.
- Recommended tolerance for shaft diameters is h6 and h7.
- In case of mounting on D-cut shaft, be careful about the position of the D-cut surface of the shaft. ➔ P.xxxx

Performance

Part Number	Max. Bore Diameter (mm)	Keyway Additional Modification Max. Bore Diameter (mm)	Rated *1 Torque (N・m)	Max. Rotational Frequency (min ⁻¹)	Moment of Inertia *2 (kg・m ²)	Static Torsional Stiffness (N・m/rad)	Max. Lateral Misalignment (mm)	Max. Angular Misalignment (°)	Max. Axial Misalignment (mm)	Mass *2 (g)
XGT-15CS	6	—	1.1	42000	2.3×10^{-7}	43	0.15	1.5	±0.2	8
XGT-19CS	8	6	2.1	33000	6.9×10^{-7}	88	0.15	1.5	±0.2	14
XGT-25CS	12	9	4	25000	2.5×10^{-6}	140	0.15	1.5	±0.2	27
XGT-27CS	14	10	4	23000	3.4×10^{-6}	140	0.15	1.5	±0.2	30
XGT-30CS	15	11	6.3	21000	6.0×10^{-6}	220	0.2	1.5	±0.3	44
XGT-34CS	16	12	8	18000	1.0×10^{-5}	390	0.2	1.5	±0.3	61
XGT-39CS	20	15	13.5	16000	2.3×10^{-5}	520	0.2	1.5	±0.3	98
XGT-44CS	22	17	18	14000	3.7×10^{-5}	640	0.2	1.5	±0.3	124
XGT-56CS	28	22	35	11000	1.2×10^{-4}	1500	0.2	1.5	±0.3	252

*1 : Correction of rated torque due to load fluctuation is not required. If ambient temperature exceeds 30°C, be sure to correct the rated torque with temperature correction factor shown in the following table.

The allowable operating temperature of **XGT-CS** is -20°C to 80°C.

※ The shaft's slip torque may be smaller than the coupling's rated torque depending on the shaft bore. ➔ P.xxxx

*2 : These are values with max. bore diameter.

● Ambient Temperature / Temperature Correction Factor

Ambient Temperature	Temperature Correction Factor
-20°C to 30°C	1.00
30°C to 40°C	0.80
40°C to 60°C	0.70
60°C to 80°C	0.55

● Part number specification

XGT-34CS-11-12


◀1

◀2

XGT-C Flexible coupling - High - gain rubber type - Standard type

WEB Selection Tool
 WEB CAD Download
 Zero Backlash
 High gain supported
 High torque
 Vibration absorption

XGT-C

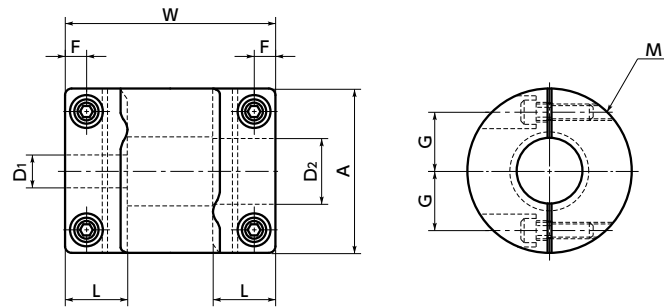

Dimensions

Unit : mm

Part Number	A	L	W	F	G	M	Screw Tightening Torque (N·m)
XGT-15C	15	6.5	23	2.15	5	M1.6	0.25
XGT-19C	19	7.7	26	2.65	6.5	M2	0.5
XGT-25C	25	9.5	32	3.25	9	M2.5	1
XGT-30C	30	11	36	4	11	M3	1.5
XGT-34C	34	12	38	4	12.25	M3	1.5
XGT-39C	39	15.5	48	4.5	14.5	M4	2.5
XGT-44C	44	15	48	4.75	16	M4	2.5
XGT-56C	56	19.5	60	5.5	20	M5	7

Part Number	Standard Bore Diameter									
	D1-D2									
XGT-15C	3 - 5	3 - 6	4 - 4	4 - 5	4 - 6	4.5 - 5	5 - 5	5 - 6	6 - 6	
XGT-19C	4 - 5 6.35 - 8	4 - 8 8 - 8	5 - 5	5 - 6	5 - 7	5 - 8	6 - 6	6 - 6.35	6 - 7	6 - 8
XGT-25C	5 - 6 8 - 10	5 - 8 8 - 11	6 - 6 8 - 12	6 - 8 10 - 10	6 - 10 10 - 12	6 - 11 12 - 12	6 - 12	6.35 - 8	6.35 - 10	8 - 8
XGT-30C	8 - 8 10 - 15	8 - 10 11 - 12	8 - 11 12 - 12	8 - 12 12 - 14	8 - 14 12 - 15	8 - 15 14 - 14	10 - 10 14 - 15	10 - 11 15 - 15	10 - 12	10 - 14
XGT-34C	8 - 8 10 - 15	8 - 10 11 - 11	8 - 11 11 - 12	8 - 12 12 - 12	8 - 14 12 - 14	8 - 15 12 - 15	10 - 10 14 - 14	10 - 11 14 - 15	10 - 12 15 - 15	10 - 14 16 - 16
XGT-39C	10 - 10 12 - 20	10 - 12 14 - 14	10 - 14 14 - 15	10 - 15 14 - 16	10 - 16 15 - 15	12 - 12 15 - 16	12 - 14 15 - 19	12 - 15 16 - 16	12 - 16 17 - 17	12 - 19 20 - 20
XGT-44C	12 - 12 15 - 19	12 - 14 15 - 20	12 - 16 16 - 16	12 - 19 16 - 19	14 - 14 17 - 17	14 - 15 19 - 20	14 - 16 20 - 20	14 - 19	15 - 15	15 - 16
XGT-56C	15 - 15	15 - 19	15 - 20	15 - 25	19 - 20	19 - 24	20 - 20	20 - 25	24 - 25	25 - 25

- All products are provided with hex socket head cap screw.
- Recommended dimensional allowances of applicable shaft diameter are h6 and h7.
- In case of mounting on D-cut shaft, be careful about the position of the D-cut surface of the shaft. ➡ P.258

Performance

Part Number	Max. Bore Diameter (mm)	Rated*1 torque (N·m)	Max. Rotational Frequency (min ⁻¹)	Moment*2 of Inertia (kg·m ²)	Static Torsional Stiffness (N·m/rad)	Max. Lateral Misalignment (mm)	Max. Angular Misalignment (°)	Max. Axial Misalignment (mm)	Mass*2 (g)
XGT-15C	6	1.1	42000	2.7×10^{-7}	43	0.15	1.5	±0.2	8
XGT-19C	8	2.1	33000	8.4×10^{-7}	88	0.15	1.5	±0.2	14
XGT-25C	12	4	25000	3.0×10^{-6}	140	0.15	1.5	±0.2	28
XGT-30C	15	6.3	21000	6.9×10^{-6}	220	0.2	1.5	±0.3	45
XGT-34C	16	8	18000	1.3×10^{-5}	390	0.2	1.5	±0.3	65
XGT-39C	20	13.5	16000	2.7×10^{-5}	520	0.2	1.5	±0.3	98
XGT-44C	22	18	14000	4.2×10^{-5}	640	0.2	1.5	±0.3	136
XGT-56C	28	35	11000	1.4×10^{-4}	1500	0.2	1.5	±0.3	276

*1 : Correction of rated torque due to load fluctuation is not required. However, if ambient temperature exceeds 30°C, be sure to correct the rated torque with temperature correction factor shown in the following table. The allowable operating temperature of **XGT-C** is -20°C to 80°C.

*2 : These are values with max. bore diameter.

● Ambient Temperature / Temperature Correction Factor

Ambient temperature	Temperature correction factor
-20°C to 30°C	1.00
30°C to 40°C	0.80
40°C to 60°C	0.70
60°C to 80°C	0.55

● Part number specification

XGT-39C - 12-20

1
 2

Additional Keyway at Shaft Hole ➡ P.803 Available / Add'l charge	Cleanroom Wash & Packaging ➡ P.807 Available / Add'l charge	Change to Stainless Steel Screw ➡ P.805 Available / Add'l charge
---	--	---